
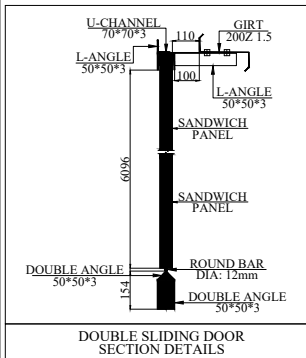
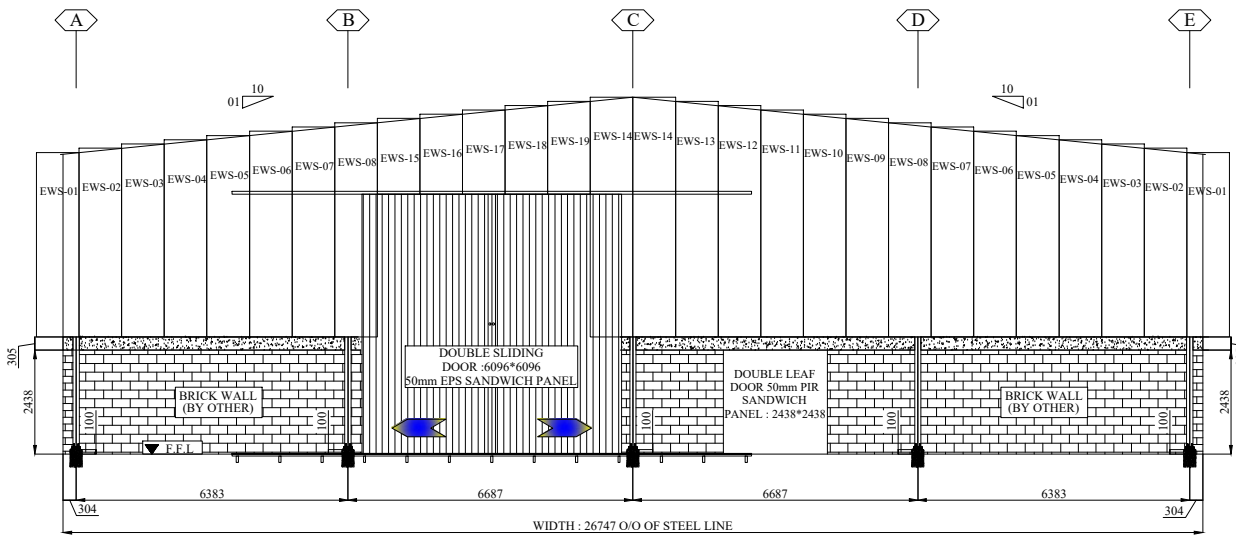


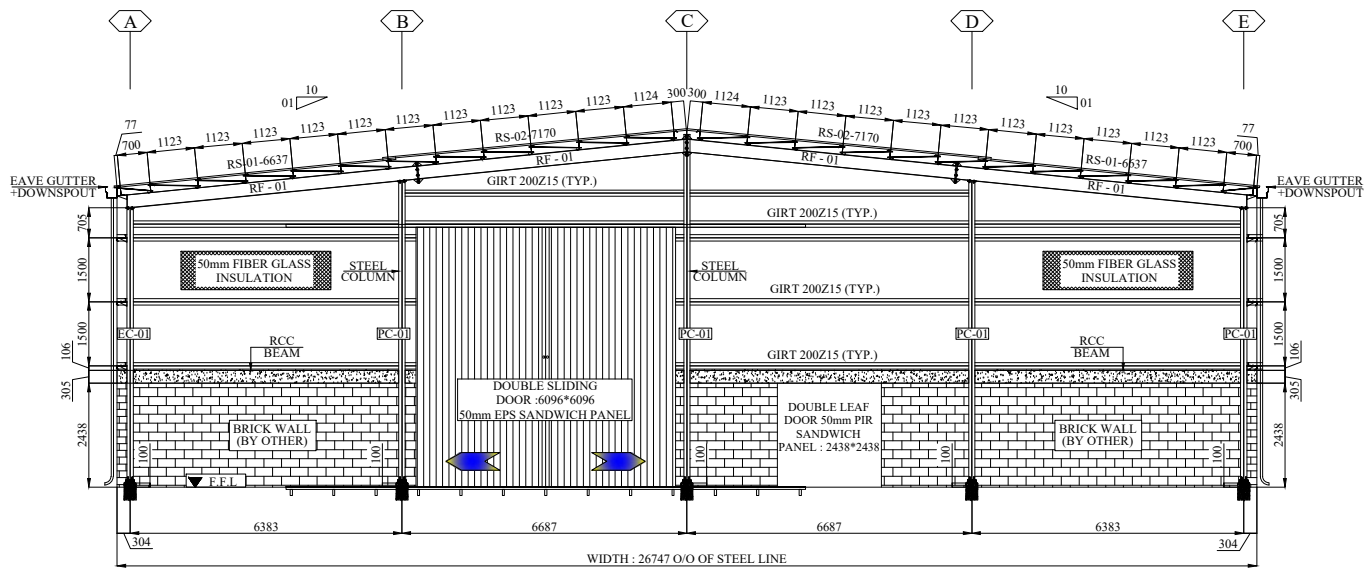

END WALL FRAMING & SHEETING @ GRID - 1

FOR APPROVAL :

IN ORDER TO SCHEDULE THIS PROJECT
IN AN EFFICIENT MANNER , KINDLY
RETURN THESE DRAWINGS WITH YOUR
ANY CHANGES MADE AFTER THE
COMMENTS MARKED IN RED
APPROVAL OF THESE DRAWINGS MAY
DELAY THE FABRICATION SCHEDULE AND
SUBSEQUENTLY THE DELIVERY OF THE
BUILDING.
PLEASE TICK MARK ONLY ONE OF THE FOLLOWING

☐ " APPROVED AS IS "
☐ " APPROVED AS NOTED "
☐ " RESUBMIT AS NOTED "
APPROVE : _____
SIGNATURE: _____
DATE : _____

END WALL SHEETING @ GL- 01

DESCRIPTIONS	PART	LENGTH (MM)	WIDTH (MM)	QUANTITY
END WALL SHEETING	EWS-01	4,331	1,000	2
END WALL SHEETING	EWS-02	4,431	1,000	2
END WALL SHEETING	EWS-03	4,531	1,000	2
END WALL SHEETING	EWS-04	4,631	1,000	2
END WALL SHEETING	EWS-05	4,731	1,000	2
END WALL SHEETING	EWS-06	4,831	1,000	2
END WALL SHEETING	EWS-07	4,931	1,000	2
END WALL SHEETING	EWS-08	5,031	1,000	2
END WALL SHEETING	EWS-09	5,131	1,000	1
END WALL SHEETING	EWS-10	5,231	1,000	1
END WALL SHEETING	EWS-11	5,331	1,000	1
END WALL SHEETING	EWS-12	5,431	1,000	1
END WALL SHEETING	EWS-13	5,531	1,000	1
END WALL SHEETING	EWS-14	5,631	1,000	2
END WALL SHEETING	EWS-15	1,777	1,000	1
END WALL SHEETING	EWS-16	1,877	1,000	1
END WALL SHEETING	EWS-17	1,977	1,000	1
END WALL SHEETING	EWS-18	2,077	1,000	1
END WALL SHEETING	EWS-19	2,177	1,000	1

00	07-10-25	ISSUED FOR APPROVAL	I.U	M.B	NAS
REV.	DATE	DESCRIPTION	DRWN BY	CHK BY	APR BY



MAIMAAR STEEL Pvt.Ltd
238, Raiwind Road, Thokar Niaz Baig ,LAHORE, Pakistan
E-mail: nasir.abbas@maimaargroup.com
E-mail: maimaar.steel@gmail.com
Website: www.maimaargroup.com
E-mail: nasir.abbas@maimaargroup.com
Mob-1 : +(92-300) 807 4017 ,+(92-333) 807 1115

JOB NO.	MSPL-206	BUILDING #.	01
PROJECT NAME	EXTENSION OF PLANT BUILDING FOR DAIRYLAC		
CUSTOMER	--		
JOBSITE LOCATION	JARANWALA		

END WALL FRAMING & SHEETING @ GRID - 1

DWG. NO.
16